


SEMI - AUTOMATIC PAPER ROLLS PACKAGING MACHINE

Paper converting & packaging machinery



P.O.BOX:1371, INDUSTRIAL AREA OF THESSALONIKI - 570 22, THESSALONIKI, GREECE - ÔEL.: +30 2310 685 969, FAX: +30 2310 685 971

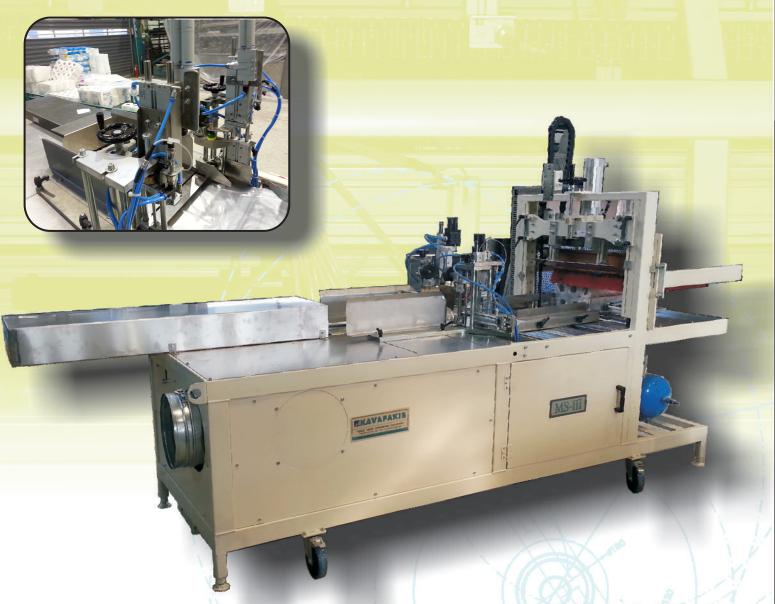

e-mail: sales@kavafakis.gr • info@kavafakis.gr

www.kavafakis.eu www.kavafakis.gr



SEMI - AUTOMATIC PAPER ROLLS PACKAGING MACHINE



TECHNICAL FEATURES

- Packaging or repackaging of tissue products like toilet rolls, towels or napkins
- Ine-layer arrangement in 2,4,6,8,9,10,12,15,16 and 20 in plastic bags
- Ôwo layer arrangement in 8,12,16,18,20,24,32 and 40 in plastic bags
- Maximum width of package : 480 mm
- Maximum height of package : 650 mm
- Height of package : range 93mm 230mm
- Deck for ream of up to 200 bags, with or without handle.Adjustable clamps for both Height & Width. Pneumatic bag
- opening systemÁutomatic filling pusher. 2 working pistons with independent valves
- Áutomatic activation of the welding system. Pneumatic movement
- Linear welding and cutting of the bag (wrapping)
- Ålectronic digital instrument for controlling the temperature of the welding and of the cutting of the plastic trim
- Ôwo programs of the welding time
- Automatic bag trim removal via suction system
- Complete electrical control board. P.L.C. controller
- with automatic and manual operating modes.Operating cycle = 4 seconds
- Iverall power motor consumption: 0,75 Kw (0,99Hp)
- Iverall resistance consumption: 1,0 Kw.
- Pneumatic consumption: 260 lt/min



